

### LITHIUM BATTERIES



## 2CR5 6V 1500mAh

lithium-manganese dioxide batteries

#### Electrical characteristics

(Stored for one year or less)

◉ Nominal Capacity (20mA to 4.0V, at 25°C)	1500mAh
◉ Nominal voltage	6.0V
◉ Max continuous discharge current	1500mA
◉ Max. Pulse current Current value is obtained 4.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25°C	3500mA
◉ Storage temperature	20°C ~ 30°C
◉ Operating temperature	-40°C ~ 60°C
◉ Weight (approx)	35g

#### WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 100°C, incinerate or expose contents to water.

#### Key features

- High and stable operating voltage
- Low self-discharge rate  
Less than 1% after 1 year of storage at 20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

UL Component Recognition  
File Number MH 45782

#### Main applications

- TPMS
- Alarms and security system
- Memory back-up
- Tracking system
- Automotive electronics
- Professional electronics
- Computer real-time clocks


.....

### LITHIUM BATTERIES

## 2CR5

lithium-manganese dioxide batteries

#### Dimensions:

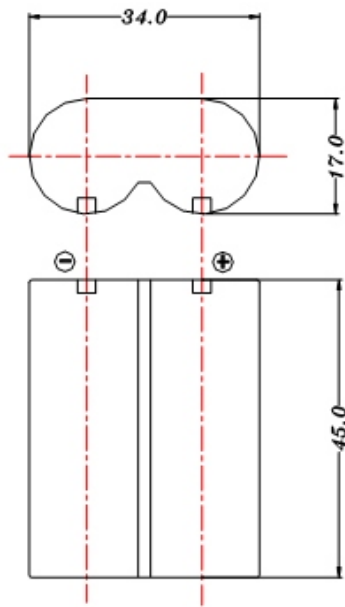

Unit: mm

Available Terminations	
-/P	Axial Pin
-/T /PT2	Radial Pin
-/PT /TP	Polarized Tab

#### Typical discharge at 25°C

