


## CR123A

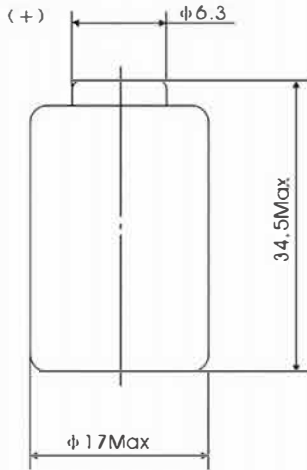

**SPECIFICATION: (23±2°C)**

Nominal capacity ( 1mA~2V ):	1500MAH
Rated voltage:	3.0 V
Max constant current of discharge:	1500 mA
Max discharge current(pulse):	3000 mA
Weight:	17g
Operating temperature range:	-20~60°C

S: Standard termination


**Notes:**

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


**Important Notes**

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.


Temperature Characteristics

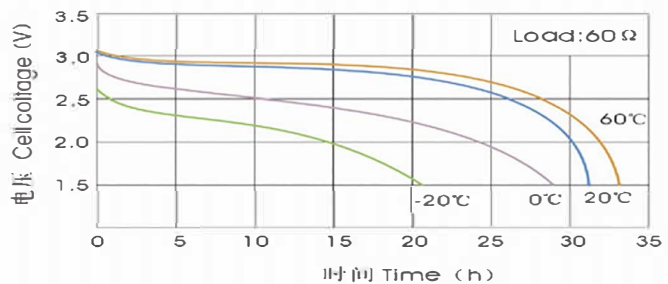

Discharge Characteristics

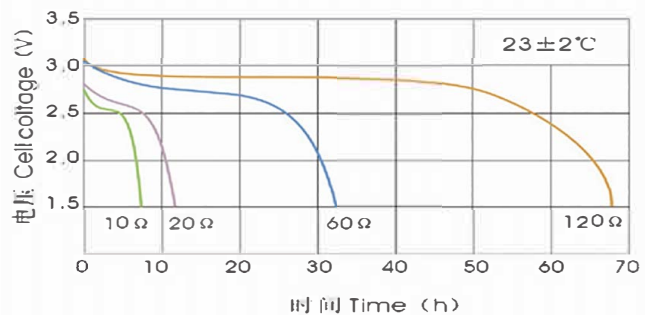

load-Capacity Characteristics

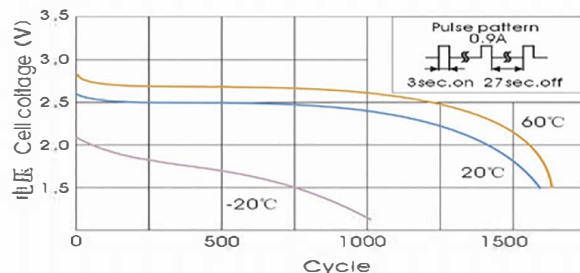

Guangzhou Markyn Battery Co., Ltd.  
 Makyns , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C  
 Tel:(86)20 — 8456 0852Fax:(86)20 — 3476 7936  
 Email:sale s@gmbattery.com