


## ER 10250

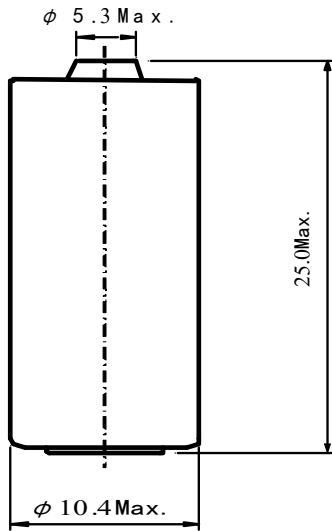

### SPECIFICATION: (23±2°C)

Nominal capacity (0.5mA~2V):	0.40Ah
Rated voltage:	3.6 V
Max constant current of discharge:	5mA
Max discharge current(pulse):	10mA
Weight:	4g
Operating temperature range:	-55~85°C

S: Standard termination

#### Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins


#### Important Notes

Do not short or charge the battery.


Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.


### Discharge characteristics at 23±2°C

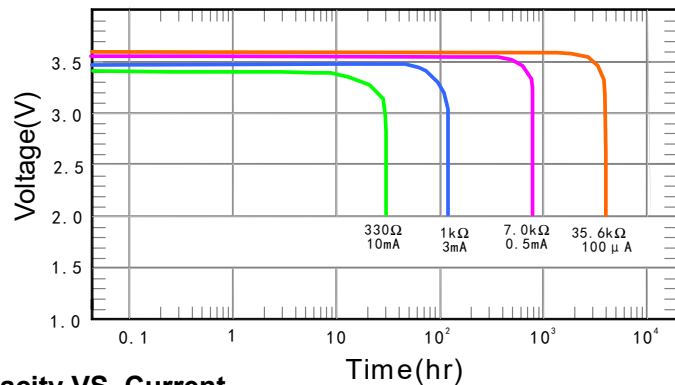

### Capacity VS. Current

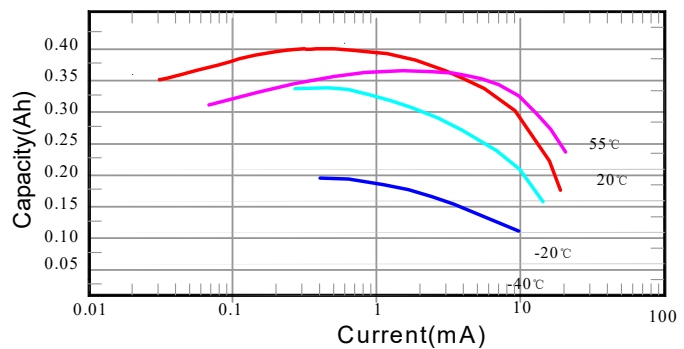

### Voltage VS. Temperature

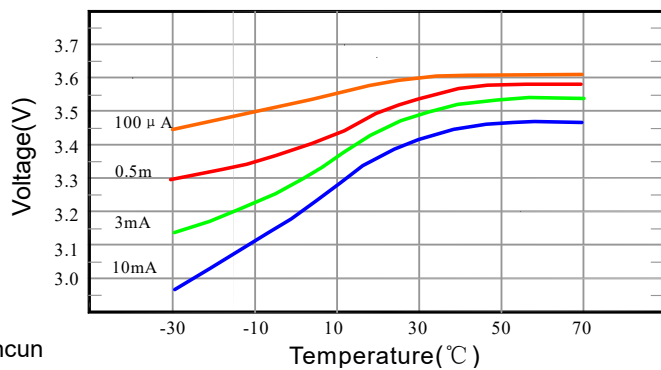

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park, Shixin Road 1100, Nancun

Town, Panyu District, Guangzhou P.R.C

Tel: (86)20 — 8456 0852 Fax: (86)20 — 3476 7936

Email: sale\_s@gmbattery.com