


## ER 17335M

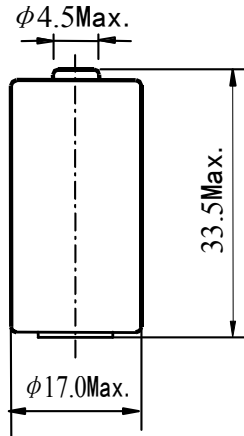

### SPECIFICATION: (23±2°C)

Nominal capacity (10mA~2V):	1.7Ah
Rated voltage:	3.6 V
Max constant current of discharge:	500mA
Max discharge current(pulse):	1000mA
Weight:	21g
Operating temperature range:	-55~85°C

S: Standard termination


#### Notes:

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


#### Important Notes

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.


### Discharge characteristics at 23±2°C

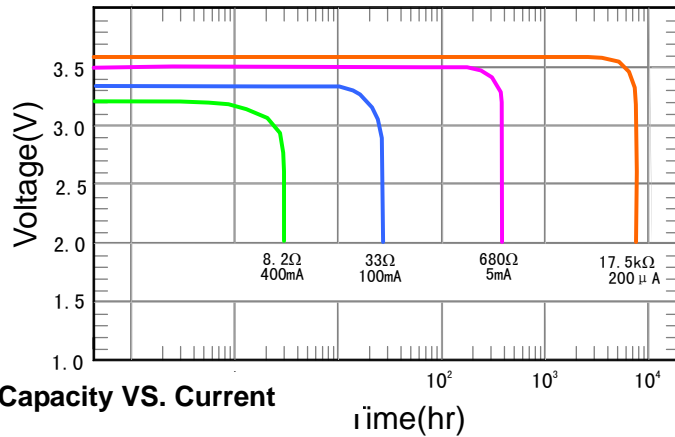

Capacity VS. Current

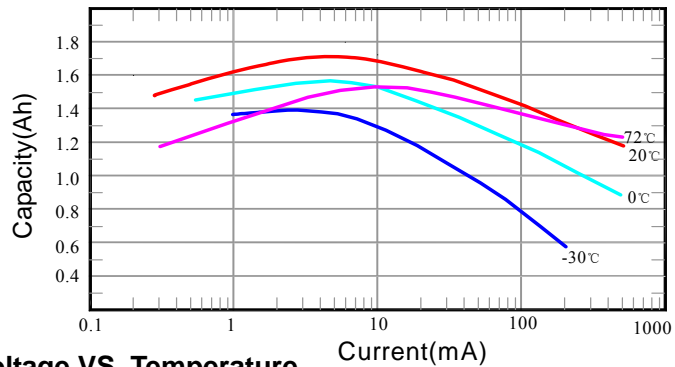

Voltage VS. Temperature

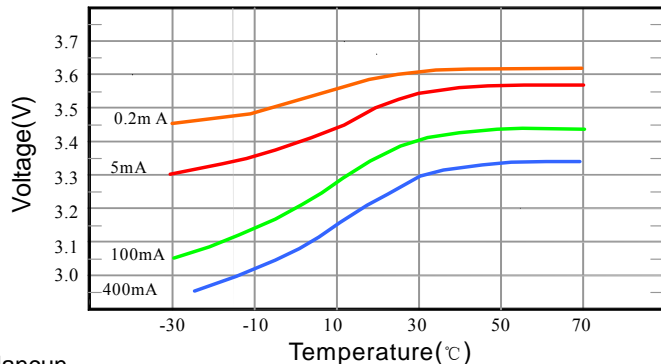

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com

U.L. Component Recognition MH 45782