

DATE SHEET-CP502440


3.0V 1200mAh

Electrical characteristics

Type	CP502440
System	lithium/ manganese dioxide
Nominal capacity (mAh)	1200@1mA to 2.0V @23°C
Rated voltage (V)	3.0
Impedence at 1kHz (Ω)	5
Max. continuous current (mA)	400
Max. pulse current (mA)	800
Storage temperature	-20 ~+40 °C
Operation temperature range	-20°C ~+60°C
Weight (g)	8.5
Specific energy	410Wh/Kg
Energy density	700Wh/L
Anode tape/cathode tape	Aluminum/Nickel
Self Discharge Rate	Under 2% for years@30°C
Jacket	Flexible Aluminum Foil Packaging

Max. dimensions (mm) 5.2×24.5×41

Any special or specific for shape, thickness or discharge rate, please consult GMB.

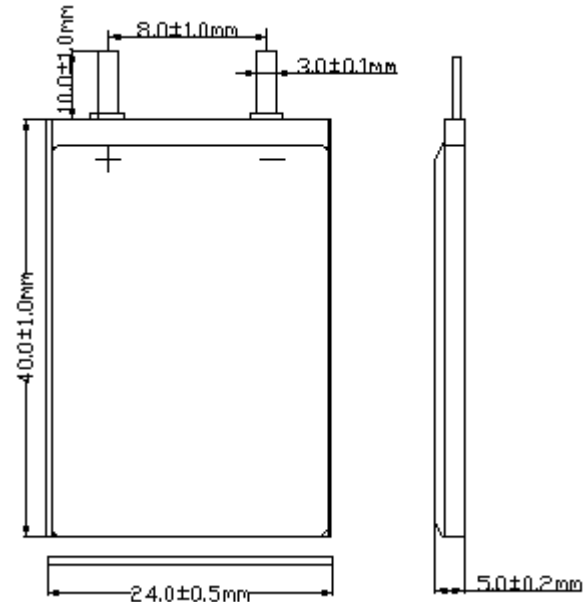

Key Features

- High Energy Density
- High single cell voltage
- Light weight
- Small Size
- High security
- Stable operating voltage
- Wide Operating temperature range
- Low Self-discharge rate
- Flexible on shape design
- Restricted for UL、UN38.3 and ROHS
- UL file: MH45782

Guangzhou Markyn Battery Co., Ltd.

Block 2, haijing Road 06, Markyns industrial Zone, Xinzao Town, Panyu District, Guangzhou, P.R.C..

Tel: (86)20 — 34729558 Fax:(86)20 — 3476 5531

Email:sales@gmbattery.com




Discharge Curve


DATE SHEET- CP502440

Constant Current

3.0V1200mAh

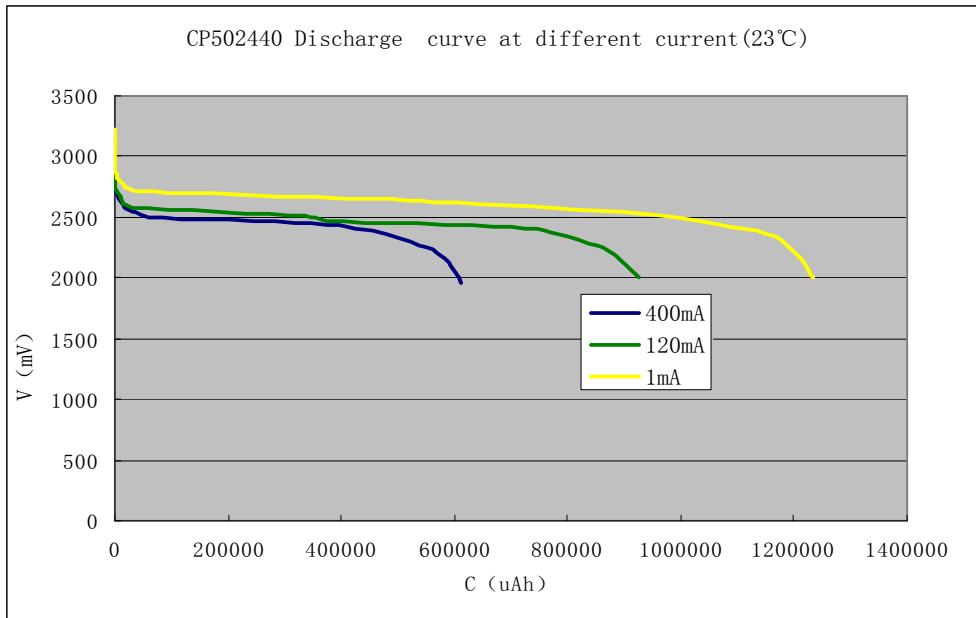

Capacity VS Temperature

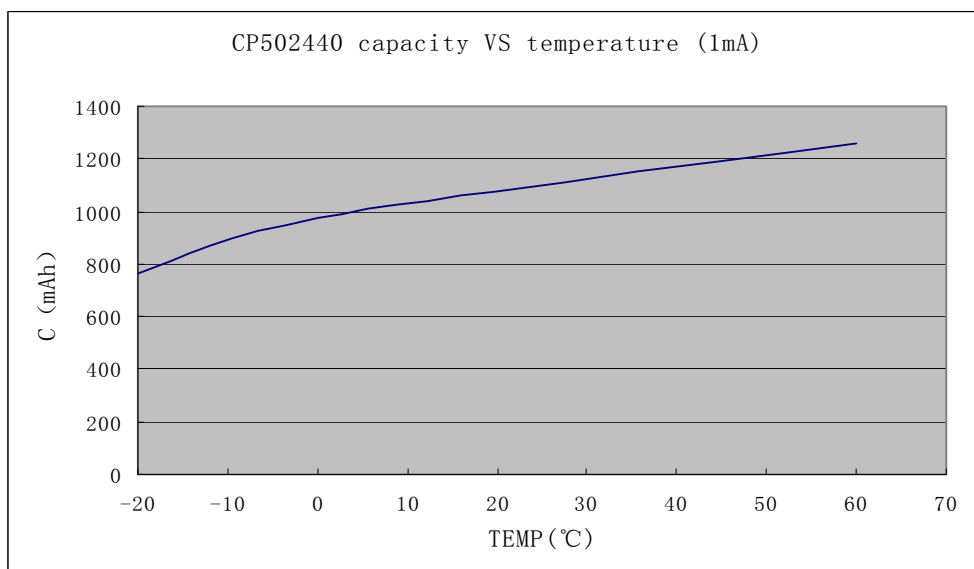

Guangzhou Markyn Battery Co., Ltd.

Block 2, haijing Road 06, Markyns industrial Zone, Xinzao Town,

Panyu District, Guangzhou, P.R.C..

Tel: (86)20 — 34729558 Fax:(86)20 — 3476 5531

Email:sales@gmbattery.com

