



ER 14335M

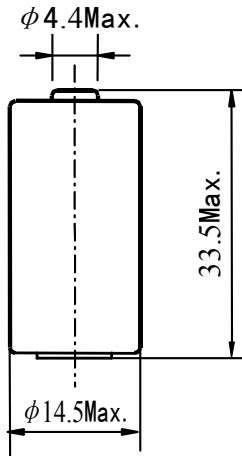


SPECIFICATION: (23±2°C)

Nominal capacity (4mA~2V):	1.2Ah
Rated voltage:	3.6V
Max constant current of discharge:	300mA
Max discharge current(pulse):	500mA
Weight:	13g
Operating temperature range:	-55~85°C


Discharge characteristics at 23±2°C

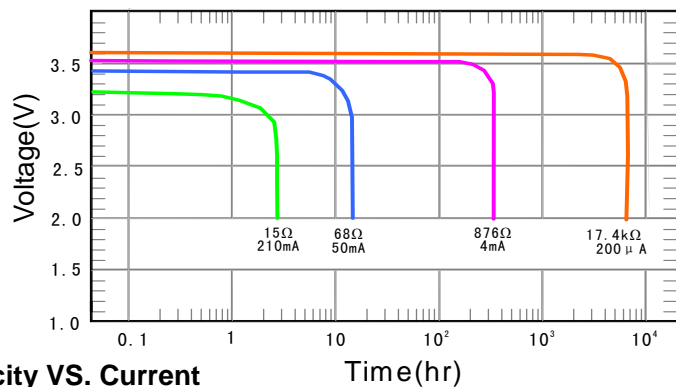

Capacity VS. Current

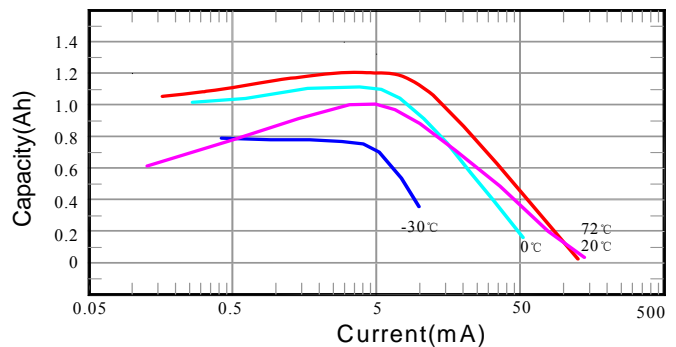

Voltage VS. Temperature

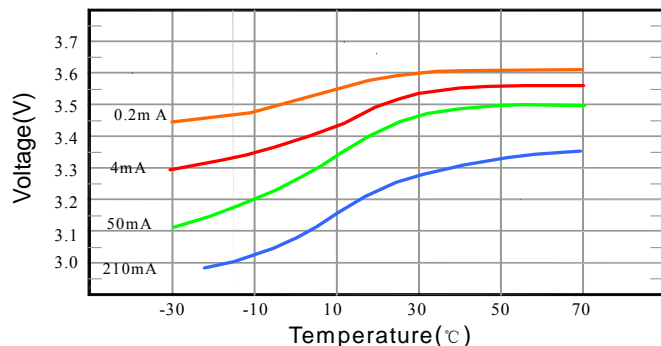

S: Standard termination

Notes:

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins

Important Notes

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.



Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com

U.L. Component Recognition MH 45782